

NXC® Capacitor Fuse

Greater latitude in capacitor bank design is now possible with the Cooper Power Systems® NXC® outdoor, current-limiting capacitor fuse. It allows safe fusing of at least 50,000 joules of parallel connected energy.

Fast, full-range clearing capability, an inherent advantage of the NX® current-limiting fuse line, allows the NXC to perform effectively under both high and low fault currents.

Typical applications include use in high fault areas, fusing of individual capacitors, capacitive circuits requiring positive isolation, circuits where let-through current must be restricted, areas where burning debris cannot be tolerated and where high noise levels are undesirable.

The NXC fuse makes use of an automatic leader wire ejection feature for positive interruption and capacitor isolation. Another feature is the visible indication of a sensed fault. Both clearing and indicating operations take place without the functioning of hinges, flippers or other mechanical devices. See Table 1 for fusing recommendations.

APPLICATION

Table 1 lists the individual fusing recommendations for applying NXC fuses in outdoor capacitor banks. The fusing tables are based on the following:

$$I_{\text{Capacitor}} = \frac{\text{kVar unit}}{\text{kV unit}}$$

$$I_{\text{Fuse}} = I_{\text{Capacitor}} \times 1.35 \text{ Protective Margin}$$

The protective margin accounts for normal overvoltages, harmonics, capacitor tolerances and a 25°C ambient.

TEMPERATURE DERATING

Temperature derating is required when NXC fuses are applied in ambient conditions exceeding 25°C. The derating formula is:

$$A_T = A_{25} [1 - .0065 (T-25)]$$

$$A_T = \text{Amp rating of fuse at } "T"^\circ\text{C.}$$

$$A_{25} = \text{Amp rating of fuse at } 25^\circ\text{C.}$$

T = Temperature of maximum ambient the fuse will be subjected to at any time.



Figure 1. NXC outdoor capacitor fuse, available in voltage ratings of 8.3, 15.5 and 23 kV, offers positive leader wire ejection for reliable interruption and elimination of electrical stress to circuit apparatus. Top end cap has provision for convenient bus bar mounting.

TABLE 1

Capacitor or Unit Voltage Rating	Fuse Voltage Rating (kV)	50 kVar*	100 kVar	150 kVar	200 kVar	300 kVar	400 kVar
2400	8.3	30	65	90**	—	—	—
2770	8.3	25	65	80**	—	—	—
4160	8.3	18	40	65	65	—	—
4800	8.3	18	30	45	65	—	—
6640	8.3	18	25	40	45	65	90**
7200	8.3	18	25	30	40	65	90**
7620	8.3	18	18	30	40	65	90**
7960	8.3	18	18	30	40	65	80**
8320	15.5	10	18	25	35	50**	70**
9960	15.5	10	18	25	30	50**	60**
12470	15.5	—	12	18	25	35	50**
13280	15.5	—	12	18	25	35	50**
13800	15.5	—	10	18	25	30	50**
14400	15.5	—	10	18	25	30	50**
19920	23.0	—	12	12	18	25	36**

*For 50 kVar capacitors, it is difficult to choose reasonably sized fuses which will withstand the I²t outrush. This occurs due to the fact that I²t withstand goes down exponentially with fuse link rating rather than linearly.

Consequently, the 50 kVar capacitor fusing recommendations only cover those units with voltages up to 9960 V.

**Indicates 2 fuses in parallel.

Example:

Select proper fuse rating for a 7200V 200 kVar capacitor to be used in an enclosed bank with maximum ambient of 55°C.

$$I_{\text{Capacitor}} = \frac{\text{kVar unit}}{\text{kV unit}} = \frac{200}{7.2} = 27.7 \text{ A}$$

$$I_{\text{Fuse}} = I_{\text{Capacitor}} \times 1.35 = 27.7 \times 1.35 = 37.39 \text{ A}$$

Choose 40A NXC and derate for 55°C ambient

$$A_T = A_{25} [1 - .0065 (T-25)]$$

$$A_{55} = 40 [1 - .0065 (55-25)]$$

$$A_{55} = 40 [.805]$$

$$A_{55} = 32.2$$

32.2 is less than required 37.39. The fuse is not adequate.

Choose 45A NXC and derate for 55°C ambient.

$$A_{55} = 45 [.805] = 36.23$$

36.23 is less than required 37.39. The 45A NXC fuse is not adequate.

Choose 65A NXC and derate for 55°C ambient.

$$A_{55} = 65 [.805] = 52.32$$

52.32 exceeds 37.38 amps. 65A NXC is proper choice.

RATINGS AND ORDERING INFORMATION

Voltage (kV)	Continuous Current (amps)	Interrupting Symmetrical (amps)	Catalog Number	Dimensions (in)		Approx. Weight (lb)
				A	B	
8.3	10	50,000	FA5J10	8	2-1/8	2.5
	18		FA5J18			
	25		FA5J25			
	30		FA5J30			
	40		FA5J40			
	45		FA5J45*			
	65		FA5J65*			
15.5	10	50,000	FA5J10	12-11/32	2-1/8	3.4
	12		FA5J12			
	18		FA5J18			
	25		FA5J25			
	30		FA5J30			
	35		FA5J35*			
23	12	50,000	FA7J12*	15-5/32	2-1/8	3.9
	18		FA7J18	15-5/32	2-1/8	3.9
	25		FA7J25*	18-3/16	2-1/8	5.3

*Contact your Cooper Power Systems representative for information on pricing and availability.

ADDITIONAL LITERATURE

Cooper Power Systems offers a variety of additional literature and reference material on NXC fuses to assist in application and coordination. For copies of any of the following material, contact your Cooper Power Systems representative or contact:

Marketing Communications
Section, Box 2850, Pittsburgh, Pa.
15230

- Bulletin 76051 Production I²t Testing of Current-Limiting Fuses
- R240-91-37 8.3 kV NXC Capacitor Fuse-TCC Curves
- R240-91-38 15.5 kV NXC Capacitor Fuse-TCC Curves
- R240-91-39 23 kV NXC Capacitor Fuse-TCC Curves
- S240-61-1 Type NXC Current-Limiting Fuse—Installation Instructions
- S240-61-2 Type NXC Current-Limiting Fuse—Individual Capacitor Fusing Installation

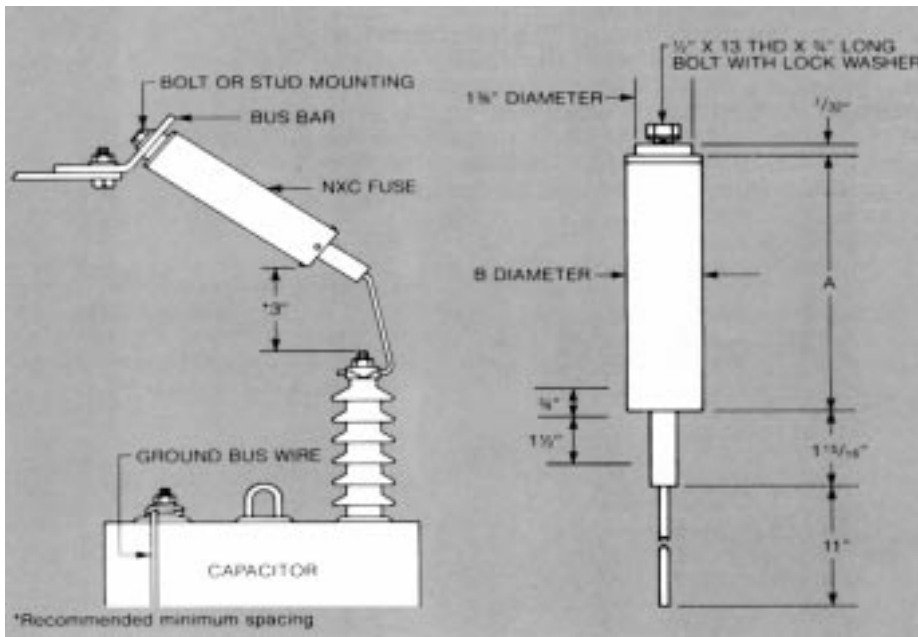


Figure 2.
Typical installation.

